



# P102™ and P103™ OEM Boards

## Versatile DGPS Receiver Boards

### key features

- Extremely affordable DGPS solution with update rates of up to 20 Hz
- Fast start-up and reacquisition times allow you to get right to work
- High-precision, differential positioning accuracy of 60 cm, 95% of the time
- Exclusive e-Dif option where other differential signals are not practical
- COAST™ technology maintains accurate solutions for 40 minutes or more after loss of differential signal
- Small form and low-power consumption design is ideal for easy integration
- Compatible with other differential sources including our L-Dif™ and RTK firmware applications



Create more advanced applications and sophisticated configurations with the P102™ and P103™ OEM boards. Experience higher update rates, noise-reduced raw measurements, additional memory, and higher processor capability.

The 12-channel, L1 DGPS board features SBAS support, along with Hemisphere GNSS' exclusive COAST™ and e-Dif® technologies, making it easy to get an accurate signal, anytime, anywhere. Accuracy and stability are excellent due to Crescent® receiver technology's more accurate code phase measurements, multipath mitigation improvements, and fewer discrete receiver components.



# P102 and P103 OEM Boards

## GPS Sensor Specifications

Receiver Type:	L1, C/A code, with carrier phase smoothing
Channels:	12-channel, parallel tracking (10-channel when tracking SBAS)
SBAS Tracking:	2-channel, parallel tracking
Update Rate:	20 Hz maximum
Horizontal Accuracy:	< 0.02 m 95% confidence (RTK <sup>1,2,3</sup> ) < 0.28 m 95% confidence (L-Dif <sup>1,2,3</sup> ) < 0.6 m 95% confidence (DGPS <sup>1</sup> ) < 2.5 m 95% confidence (autonomous, no SA <sup>1</sup> )
Cold Start:	60 s (no almanac or RTC)
Warm Start:	30 s (valid almanac and RTC)
Hot Start:	10 s (valid almanac, RTC and <2 hours since last fix)
Reacquisition:	<1 s
Maximum Speed:	1607 k/h (999 mph)
Maximum Altitude:	18,288 m (60,000 ft)

## Communications

Serial Ports:	3 full-duplex 3.3 V CMOS, 1 USB
Baud Rates:	4800 - 115200
Correction I/O Protocol:	RTCM SC-104, v2.x (SBAS/Beacon), Proprietary format (L-Dif/RTK)
Data I/O Protocol:	NMEA 0183, SLX binary
Timing Output:	1PPS (CMOS, active low, falling edge sync, 10 kΩ, 10 pF load)

## Environmental


Operating Temperature:	-30°C to +70°C (-25°F to +158°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing
Shock and Vibration:	EP 455

## Power

Input Voltage:	3.3 VDC +/- 3%
Power Consumption:	<1 W nominal
Current Consumption:	300 mA nominal
Antenna Voltage Input:	15 VDC maximum
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 Ω

## Mechanical

Dimensions:	
P102:	7.2 L x 4.1 W x 1.2 H (cm) 2.9" L x 1.6" W x 0.5" H (in)
P103:	7.1 L x 4.1 W x 1.2 H (cm) 2.8" L x 1.6" W x 0.5" H (in)
Weight:	<20 g (<0.75 oz)
Status Indication (LED):	Power, GPS lock, differential lock, and DGPS position
Power/Data Connector:	
P102:	34-pin male header, 0.05" pitch
P103:	20-pin male header, 0.05" pitch
Antenna Connectors:	MCX, female, straight

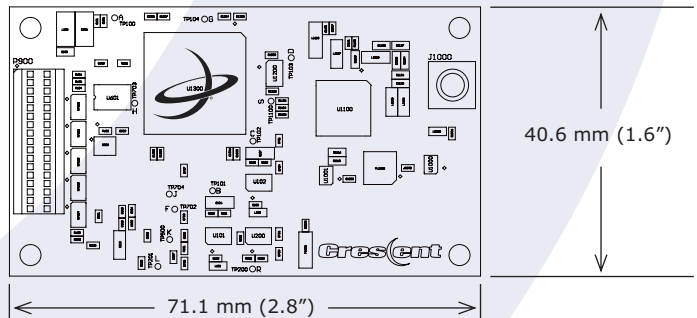

<sup>1</sup> Depends on multipath environment, antenna selection, number of satellites in view, satellite geometry, baseline length (for local services), and ionospheric activity

<sup>2</sup> Up to 5 km baseline length

<sup>3</sup> Depends also on baseline length

Authorized Distributor:

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, Hemisphere GNSS logo, Athena, Atlas, Atlas logo, Eclipse, Eclipse logo, COAST Vector, H321, and L-Dif are trademarks of Hemisphere GNSS.

Rev. 09/15



Hemisphere GNSS, Inc.  
8515 E. Anderson Drive  
Scottsdale, AZ, USA 85255

Toll-Free: +1-855-203-1770  
Phone: +1-480-348-6380  
Fax: +1-480-270-5070  
precision@hgns.com  
www.hgns.com