



## A Tallysman Accutenna® TW1600 Dual Feed Iridium® Antenna

The TW1600 employs Tallysman's unique Accutenna™ technology in a low cost OEM dual feed, passive Right Hand Circularly Polarized antenna (RHCP) for the 1616MHz to 1626MHz frequency band, specifically designed to enhance the signal to noise ratio of communications over the Iridium™ satellite communications network.

The wideband dual feed patch element in the TW1600 has an excellent axial ratio across the entire Iridium™ bandwidth. Unlike single feed antennas, the TW1600 provides excellent multipath rejection and a truly circular transmission response across the Iridium™ band.

The TW1600 includes a built-in 35mm circular ground plane but best performance is obtained with this augmented with a local system ground plane or reflecting surface equivalent to 100mm diameter (DC connection not required).


OEM antennas are easily detuned by the local environment. Tallysman offers custom tuning services for optimized integration into OEM end-user modules.

### Applications

- Higher C/No values for Iridium™ communications
- Sea & Land Container Tracking
- Military & Security
- Fleet Management & Asset Tracking
- Marine & Avionics Systems
- Law Enforcement & Public Safety

### Features

- **dual-feed, wide band** patch
- Axial ratio, <1 dB typ.
- High gain 4.5 dBic
- Robust design
- Small form factor
- -40°C to +85 °C Operation

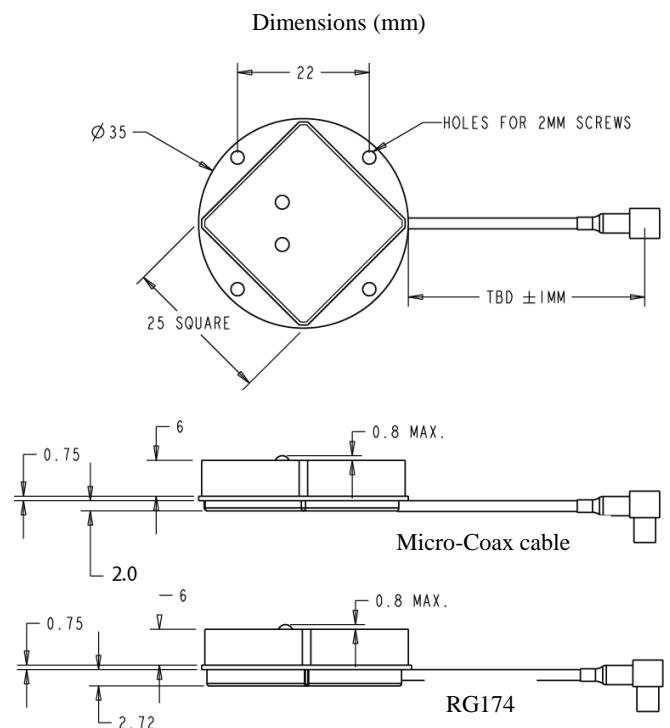

### Benefits

- Better axial ratio at lower elevation angles
- Higher Rx and Tx success rates
- Compact form factor
- RoHS compliant



## TW1600 Dual Feed Iridium® Antenna

### Specifications Over full bandwidth, T=25°C

---

#### Antenna

Architecture	Dual, quadrature feeds
Antenna Gain (100mm ground plane)	4.5dBic
Axial Ratio (over full bandwidth)	≤1.0 dB typ. 2.0 dB max
1dB Bandwidth	1605 to 1635MHz

#### Electrical

Architecture	Dual Feed Patch -> Hybrid 90° Combiner
Polarization	RHCP
VSWR (at antenna PCB)	<1.5:1 typ. 1.8:1 max.
Return Loss Bandwidth (-10 dB)	>20MHz

#### Mechanicals & Environmental

Mechanical Size	57 mm dia. x 10 mm (micro-coax cable) 11mm (RG174)
Cable	RG174
Operating Temp. Range	-40°C to +85°C
Weight	30g
Attachment Method	Magnet, Adhesive or M2 screw mount
Environmental	RoHS compliant, IP67
Shock	Vertical axis: 50G, other axes: 30G
Vibration	3 axis, sweep = 15 min, 10 to 200Hz sweep: 3G
Warranty	One year – parts and labour

---

### Ordering Information

TW1600 – Dual Feed GPS Iridium antenna 33-1600-xx-yyyy  
Where xx = connector type and yyyy = cable length in mm

Please refer to the Ordering Guide [ <http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>] for the current and complete list of available connectors.

### Tallysman Wireless Inc

36 Steacie Drive  
Ottawa ON K2K 2A9 Canada  
Tel: +1 613 591 3131 Fax 613 591 3121  
[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2016 Tallysman Wireless Inc. All rights reserved. Rev 1.2