


DSP-1750 FOG Digital Output

World's Smallest High-performance Fiber Optic Gyro

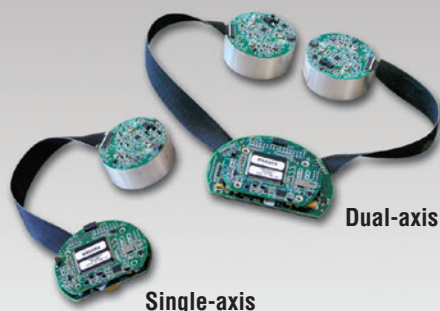

Key Features

- KVH E•Core® ThinFiber technology
- Extremely low noise, high bandwidth
- Angle random walk $\leq 0.013^\circ/\sqrt{\text{hr}}$
- Option of standard input rate of $\pm 490^\circ/\text{sec}$ or high input rate of $\pm 1000^\circ/\text{sec}^*$
- Superior bias instability of $\leq 0.05^\circ/\text{hr}$, 1σ
- Digital output; single- and dual-axis
- Magnetic shielding optional
- Commercial off-the-shelf (COTS) product
- Proven reliability – MTBF >36,000 hrs (Ground Mobile)

Applications

- Gimbals
- Optical/antenna stabilization
- Long-range optical and sensor systems
- Equipment platform stabilization
- Payloads for UAVs
- Weapons platform stabilization
- GPS/INS, IMU integration

Super-compact Single- or Dual-axis Package

KVH takes fiber optic gyro (FOG) technology to a new level of performance with the DSP-1750, the world's smallest high-accuracy FOG. Available in both single- and dual-axis configurations, the DSP-1750 is designed for a wide range of precision navigation, stabilization, and pointing applications where low noise and high performance across the entire range of operating temperatures are critical. Ideal applications include long-range optical and sensor systems, gimbals, tactical missiles, autonomous vehicle navigation, and the stabilization of virtually all types of commercial equipment platforms.

Delivering Groundbreaking Performance

The DSP-1750 delivers performance never before achieved in FOGs of similar size. Utilizing KVH's 170-micron E•Core ThinFiber, the world's smallest D-shaped optical fiber, it delivers extremely low noise coupled with high bandwidth. This super-compact FOG offers input rate options of $\pm 490^\circ/\text{sec}$ or $\pm 1000^\circ/\text{sec}^*$, exceptional ARW, and bias stability previously only available in closed-loop FOGs and ring laser gyros.

Innovative, Versatile Design

Featuring a flexible design in which the optical sensor is separate from the control electronics, the DSP-1750 has a 45.7 mm (1.8") diameter optical sensor housing connected to its power and processing electronics via a robust interlocking tether. This two-piece design allows the sensor to be installed directly on the sensitive axis, while the control circuit cards can be integrated elsewhere, such as in an existing board stack assembly. This innovative design makes the DSP-1750 easy to integrate into customer platforms where space and payload weight are at a premium.

Unmatched Quality and Reliability

KVH is the only U.S. FOG manufacturer that draws its own optical fiber, ensuring consistent quality, performance, and instant turn-on to turn-on repeatability in every FOG. And like all of KVH's precision FOGs, the solid state DSP-1750 is built using KVH's patented Digital Signal Processing (DSP) electronics design which offers significant improvements in such critical areas as scale factor and bias stability, scale factor non-linearity, and maximum input rate.



NASA's Global Hawk carrying a synthetic aperture radar payload (inset) on a fully unmanned aerial recon mission uses internal DSP-1750 gyros from KVH to maintain focused and stable imagery.



* The DSP-1750 High Rate variants are controlled by the Export Administration Act of 1979, as amended (Title 50, USC App 2401 et seq.) and its implementing regulations, the Export Administration Regulations, 15 CFR 730 et seq.

| Specifications | KVH DSP-1750 Fiber Optic Gyro - Digital Output | | | |
|--|--|----------------------|--|----------------------|
| Number of Axes | Single-Axis (Digital) | | Dual-Axis (Digital) | |
| Variant | Standard Rate | High Rate | Standard Rate | High Rate |
| Input Rate (<i>max</i>) | ±490°/sec standard rate | ±1000°/sec high rate | ±490°/sec standard rate | ±1000°/sec high rate |
| Bias Instability (25°C) | ≤0.05°/hr, 1σ | | ≤0.05°/hr, 1σ | |
| Bias vs. Temperature (≤1°C/min) | ≤3°/hr, 1σ | | ≤3°/hr, 1σ | |
| Bias Offset (25°C) | ±2°/hr | | ±2°/hr | |
| Scale Factor Non-linearity (<i>max rate</i> , 25°C) | ≤200 ppm, 1σ | | ≤200 ppm, 1σ | |
| Scale Factor vs. Temperature (≤1°C/min) | ≤300 ppm, 1σ | | ≤300 ppm, 1σ | |
| Angle Random Walk (25°C) | ≤0.013°/√hr (≤0.8°/hr/√Hz) | | ≤0.013°/√hr (≤0.8°/hr/√Hz) | |
| Electrical/Mechanical Interface | | | | |
| Bandwidth (-3 dB) | ≥440 Hz ±4% | | ≥790 Hz ±4% | |
| Initialization Time (<i>valid data</i>) | ≤3 secs | | ≤3 secs | |
| Data Interface | Asynchronous (RS-422); optional 1000 Hz or 1800 Hz | | Asynchronous (RS-422); optional 1000 Hz or 1800 Hz | |
| Baud Rate | 115.2 Kbps | | 115.2 Kbps | |
| Data Rate | 1000 Hz | | 1800 Hz | |
| Physical Specifications | | | | |
| Dimensions (<i>max</i>) | 45.7 mm Dia x 22.9 mm H (1.8" x 0.9") | | 45.7 mm Dia x 22.9 mm H (1.8" x 0.9") | |
| Weight (<i>max</i>) | Non-magnetically shielded: 0.11 kg (0.24 lbs) Magnetically shielded: 0.13 kg (0.28 lbs) | | Non-magnetically shielded: 0.14 kg (0.30 lbs) Magnetically shielded: 0.17 kg (0.34 lbs) | |
| Power Consumption | 4 W (max), <3 (typical) | | 5.5 W (max), <3.75 (typical) | |
| Input Voltage | +5 & ±8 to ±15, ±5% VDC | | +5 & ±8 to ±15, ±5% VDC | |
| Environmental Specifications | | | | |
| Temperature (<i>operating</i>) | -40°C to +75°C (-40°F to +167°F) | | -40°C to +75°C (-40°F to +167°F) | |
| Shock (<i>operating</i>) | 25 g, 11 ms, sawtooth | | 25 g, 11 ms, sawtooth | |
| Vibration (<i>operating</i>) | 8 g rms, 20-2000 Hz | | 8 g rms, 20-2000 Hz | |
| MTBF | ≥36,000 hours | | ≥22,000 hours | |

For detailed interface control drawings (ICD) and technical information on this product, please visit www.kvh.com/DSP1750docs



KVH Industries, Inc. • 50 Enterprise Center • Middletown, RI 02842 • U.S.A. • Phone: +1 401 847-3327 • Fax: +1 401 845-2410

©2011-2019, KVH Industries, Inc.

Specifications subject to change without notice

KVH and E•Core are registered trademarks of KVH Industries, Inc.

Protected by one or more of the following U.S. and foreign patents: US 8,866,564 US 7,317,847, US 6,763,153, US 6,718,097, US 6,707,558, US 6,429,939, US 6,370,289 B1, US 6,134,356, US 6,041,149, US 5,768,462, US 5,739,944, US 5,552,887. Additional patents pending.